

Wax / Resin CW603


- ▶ Cost savings and economical wax-resin option.
- ▶ Suited for tough -print labels
- ▶ Brilliant scratch resistance




As an economical wax-resin ribbon, it is best suited for tough-to-print labels and synthetic substrates like tyvek, mylar and laminates, CW603 is the most cost competitive option when it comes to wax/resin ribbons. Cost savings adds to profitability and that's our commitment to help our clients grow.

▶ Appearance


Blackness




Definition



Horizontal Barcode




Vertical Barcode




▶ Resistance

Abrasion Resistance




Scratch Resistance




▶ Other Resistance

Heat Resistance

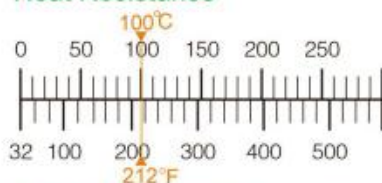

Solvent Resistance




▶ Sensitive

Printing Energy



Printing Speed



▶ Applicable Labels

Coated Paper, Hangtag	▲▲▲
Synthetic Paper	▲▲▲
PET Film	▲▲▲
PP and PVC etc	▲▲▲

Well For Custom Code

Wax / Resin CW603

Parameters of Ribbon

ITEM	SPECIFICATIONS
Material	Standard Wax / Resin
Color	Black
Carrier's Thickness	$4.5 \pm 0.3 \mu\text{m}$
Ribbon's Thickness	$7.2 \pm 0.5 \mu\text{m}$
Ink Melting Point	74℃
Color Density	≥ 1.8
Printing Speed	0-10 IPS
Heat Sensitivity	100
Heat Resistance	100℃
Scratch Resistance	70
Solvent Resistance	0
Label Applicability	100
Usage Condition	5℃~35℃, 20%~85%RH
Storage Condition	-5℃~40℃, 20%~85%RH

Certificates and Reports

- RoHS, SGS, ISO9001, MSDS ,SVHC
- No Halogen Certificate
- No Toxic Substances of SVHC

Recommendable fields of Application



Inventory Labels



Logistic Labels



Food Labels



Super Market Labels



Tag



Medicare Labels



IC Card Copy



Tickets / Bills